

***Training on Energy Efficiency in Buildings
of stakeholders in urban planning,
construction and building***

PRAIA, CABO VERDE, 9th-10th June 2014

SERA Sustainable Energy & Resources Availability

SUSANNE GEISSLER _ CÉSAR FREITAS

■ ■ Energy efficient buildings

■ ■ Basic concepts | definitions, context, practical relevance

> Contents

- > Motivation for energy efficiency of buildings
- > Improving the energy efficiency of buildings
- > Building life cycle and related energy consumption
- > Methods of optimisation: LCA and LCCA


Motivation for energy efficient buildings

Power outages | reasons

Natural cause, e.g. draught, seasonal problem of hydro power plant




Electricity networks cause massive distribution losses

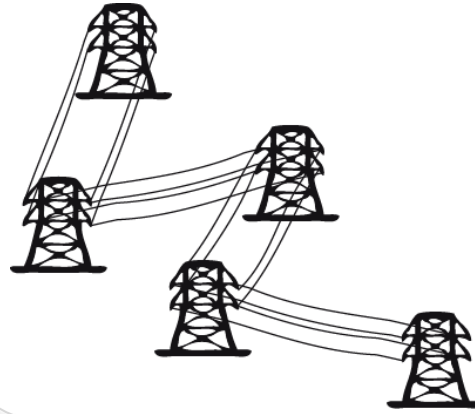

Energy efficiency in buildings reduces consumption and peak load!



High electricity peak demand (e.g. in the evening)

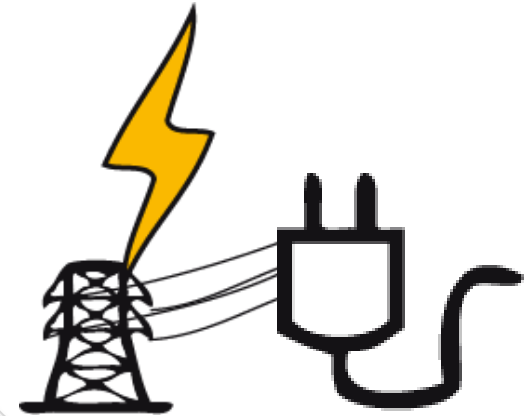

■ ■ Motivation for energy efficient buildings

■ ■ Increasing energy consumption | urbanisation in West Africa

Africa is the fastest urbanising continent, currently **40% of the African population** (in total over 1 billion inhabitants) lives in urban areas, and by 2050 this will **increase to 60%** (in total 2 billion).

The section about West African Cities in the UN Habitat publication ‘The State of African Cities 2010 Governance, Inequality and Urban Land Markets’ says about urbanisation trends in this region:

“In 1950, a mere 6.6 million people lived in Western African cities. The number and the rate of urbanisation increased only slowly until 1990. Around that time, the urbanisation rate of Western Africa overtook the continental average and began to accelerate. ... Western Africa will become predominantly urban around 2020 with an estimated 195.3 million city dwellers. By 2050, that number will reach 427.7 million, or 68.36 per cent of the total population. ... The message embedded in these statistics should be clear: Western African nations must give urgent attention to their rapidly growing urban populations. They must build governance and management capacities in cities of all sizes and plan for significant spending on services provision.”

■ ■ Motivation for energy efficient buildings

■ ■ Energy services needed to achieve development goals

Population in ECOWAS countries in 1998 and 2010: Comparing these two years, there was an increase of about 6 million people in Ghana, 40 million people in Nigeria, 4 million people in Ivory Coast, 5 million people in Niger and Burkina Faso (examples).


Electricity consumption is still low: Looking at the annual electricity consumption in kWh per capita (where data were available) in the ECOWAS region, this indicator is still very low (around 200 kWh per capita), compared with other countries in the world where the indicator is beyond 1,000 kWh per capita. In fact, an increase is necessary, in order to achieve the development goals.

Development goals, together with the phenomenon of urban growth and increasing population numbers represent an enormous challenge for the electricity supply in the ECOWAS countries.

- ■ **Motivation for energy efficient buildings**
- ■ **Electricity consumption, peak load | influence of building design**

The major amount of electricity is consumed for the following purposes:

Cooling,
ventilation
air conditioning

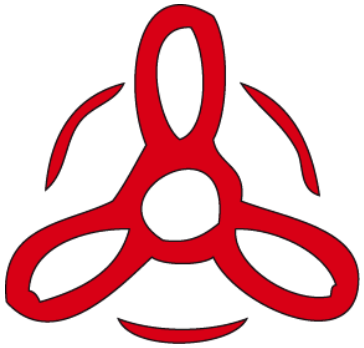

Lighting
Targeted program:
efficient lighting



Electric
appliances
Targeted program:
Eco-labels



Hot water




Energy efficiency of building envelope, good architectural design for natural ventilation and cooling, use of daylight and integration of renewable energy systems reduce electricity consumption during building utilisation.

Improving the energy efficiency in buildings

Building design | renewable energy technologies

- Avoid energy consumption by means of building design: correct building orientation; shading of window and walls
- Reduce energy consumption: use a more efficient technology which provides the same service with less energy consumption
- Substitute electricity from fossil fuels with renewables, e.g. PV
- Use electricity only where electricity is necessary: replace electric water heaters with solar water heaters

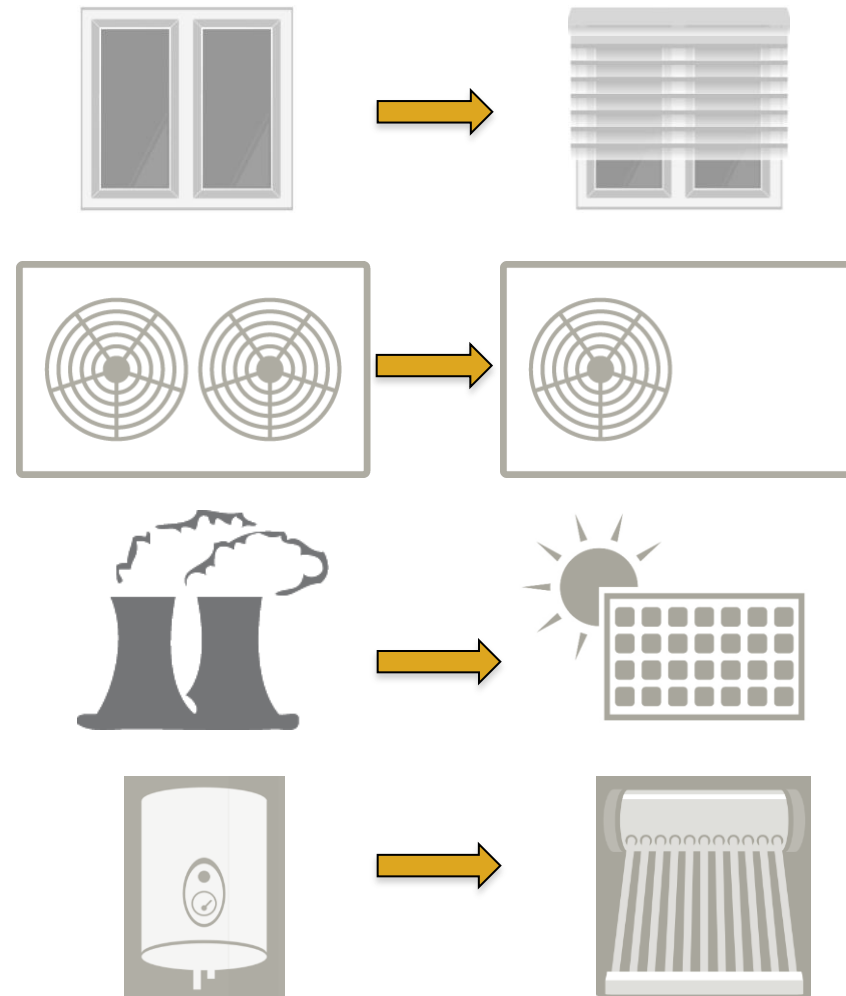

What people demand for	How to achieve what occupants demand for	
	Usual method	Energy-efficient method
Shelter and comfortable indoor climate	Cooling and air conditioning	<p>Option 1: No cooling and air-conditioning: Use local materials and traditional know-how how to make use of local conditions</p> <p>Option 2: Very little cooling and air-conditioning: reduce cooling energy consumption due to correct building orientation and appropriate façade technology</p>
Lighting	Incandescent bulbs	<p>Option 1: Architectural building concept makes use of daylight, and at the same time avoids overheating</p> <p>Option 2: Energy saving lamps in combination with presence/occupancy sensor and daylight depending control</p>
Hot water	Electric water heaters	<p>Option 1: Solar water heaters</p> <p>Option 2: Use waste heat from other processes</p>
Communication, computers for work, etc.	Electricity consumption for electric appliances	Reduced energy consumption for electric appliances due to energy saving products (see ECOWS initiative on standards and labelling)

■ ■ Improving the energy efficiency in buildings

■ ■ Comfort requirements | thermal, visual and acoustic


Humans require thermal, visual and acoustic comfort conditions.

Thermal comfort depends on six environmental and physiological factors:

- > Air temperature
- > Relative humidity
- > Temperature of surrounding surfaces
- > Air velocity
- > Clothing
- > Metabolic rate

Improving the energy efficiency in buildings

Energy efficient buildings must provide comfort

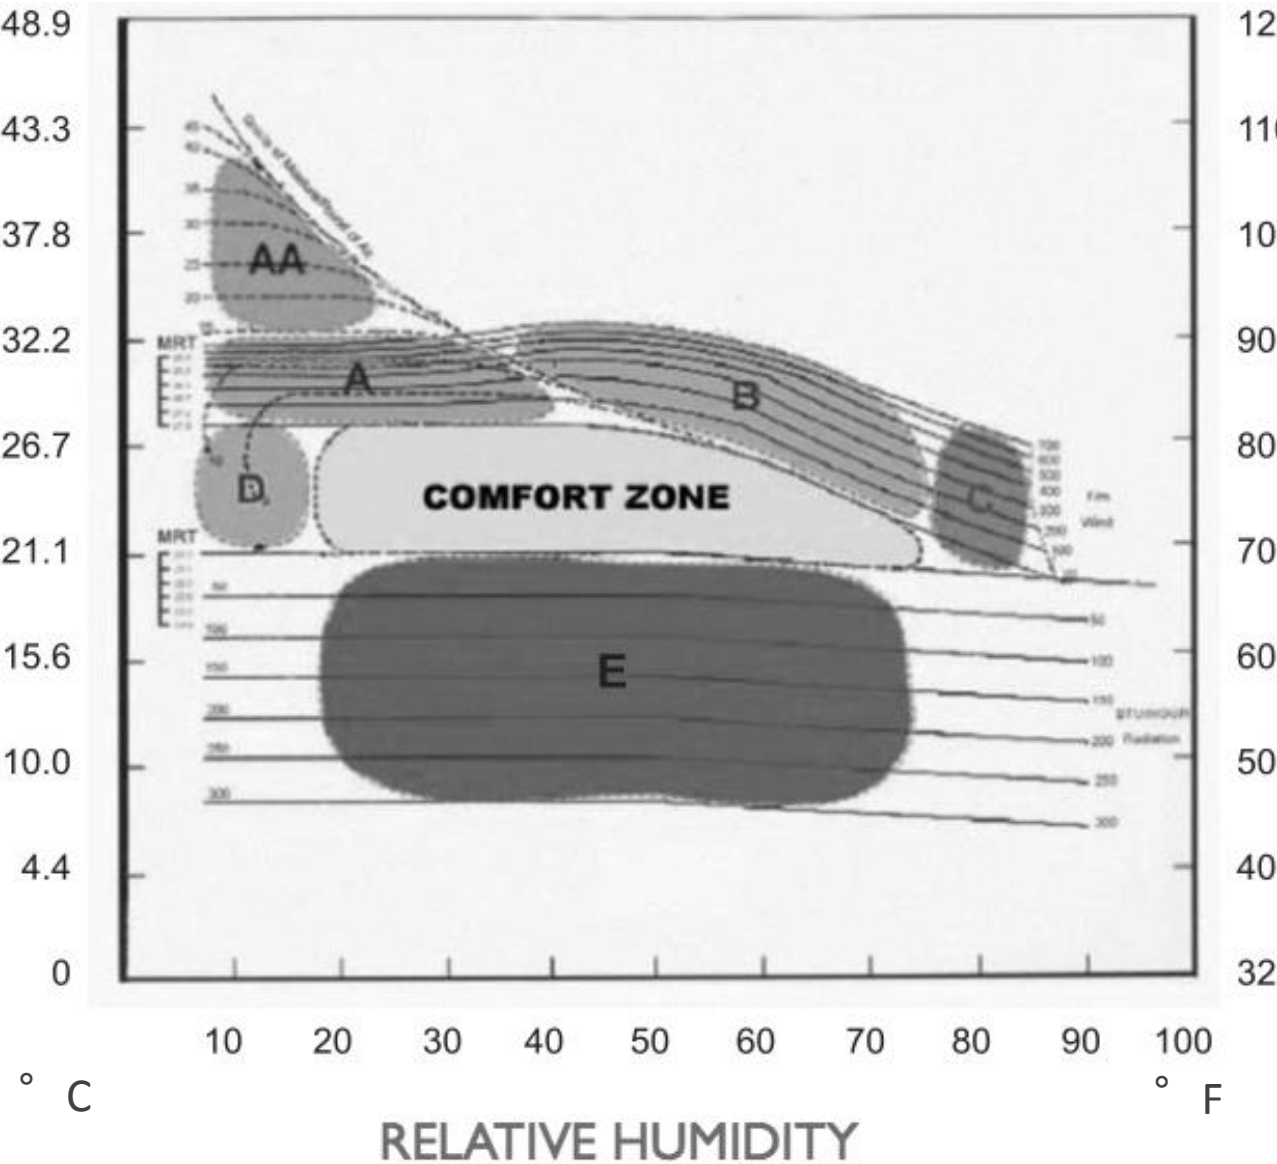

Zone	Type of climate
AA	Very hot
A	Hot
B	Hot and humid
C	High humidity
D	Very dry
E	Very cold

Source: Boonyatikarn, S. & Buranakarn,V.,2006; in: Eco-housing Guidelines for Tropical Regions; UNEP RRCAP; Bangkok,Thailand, December 2006

- ■ Improving the energy efficiency in buildings
- ■ Energy efficient buildings must provide comfort I solutions

Zone	Type	Solution
AA	Very hot	Evaporative cooling
A	Hot	Evaporative cooling & wind velocity
B	Hot and humid	Wind velocity
C	High humidity	Dehumidifying
D	Very dry	Humidifying
E	Very cold	Solar radiation


Evaporative cooling: The temperature of dry air can be dropped significantly through the phase transition of liquid water to water vapour (evaporation), which can cool air using much less energy than refrigeration. In extremely dry climates, evaporative cooling of air has the added benefit of conditioning the air with more moisture for the comfort of building occupants.

Source: Boonyatikarn, S. & Buranakarn,V.,2006; in: Eco-housing Guidelines for Tropical Regions; UNEP RRCAP; Bangkok, Thailand, December 2006


■ ■ Methods of optimisation: LCA and LCCA


■ ■ Energy consumption during the life cycle I optimisation

- Raw material extraction
- Material / component production
- Building construction
- **Building utilisation**
- Maintenance and Refurbishment
- End of life treatment
 - Disposal
 - Recycling



Material database with **Life Cycle Assessment (LCA)** results provides information about energy needed for production

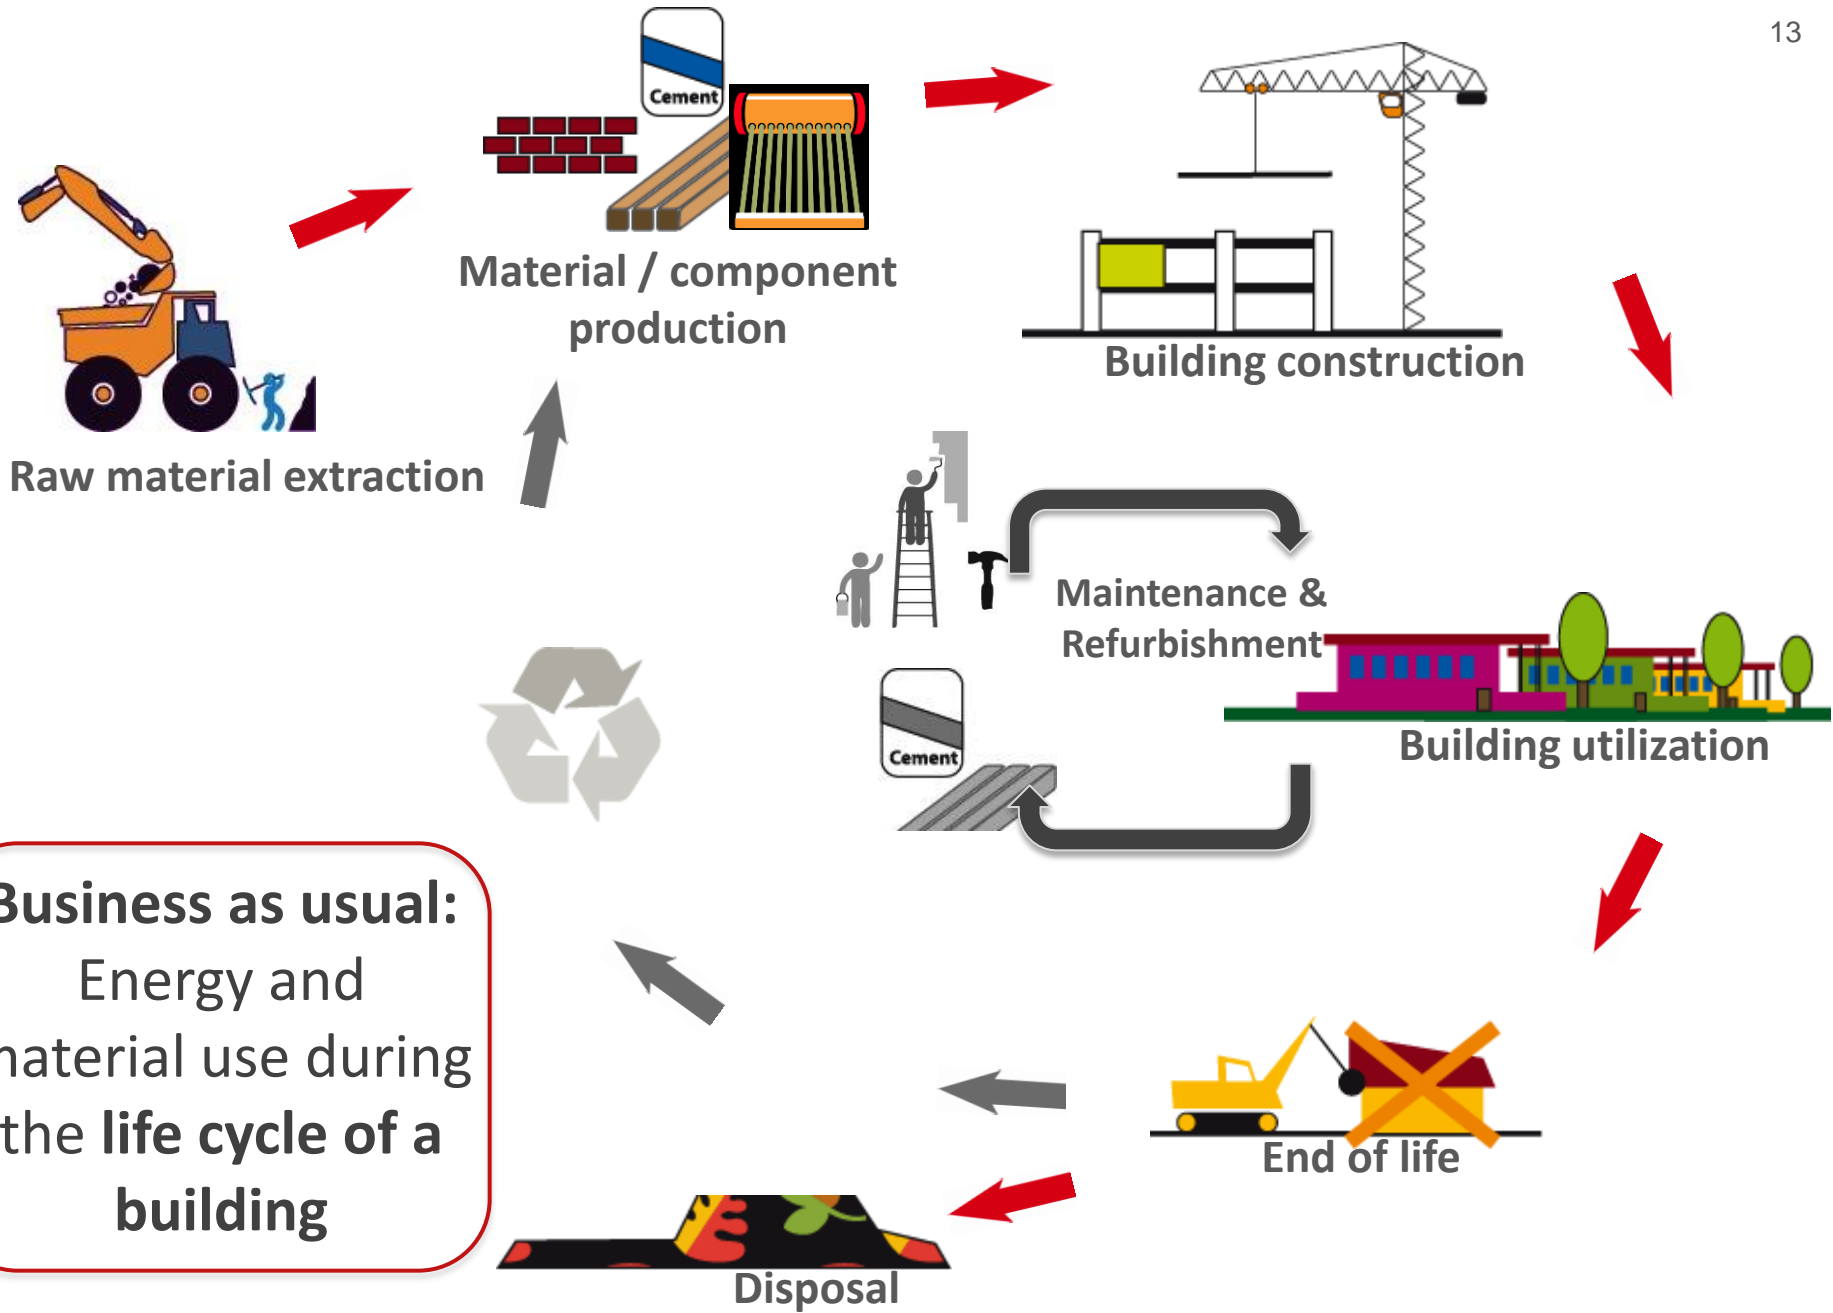

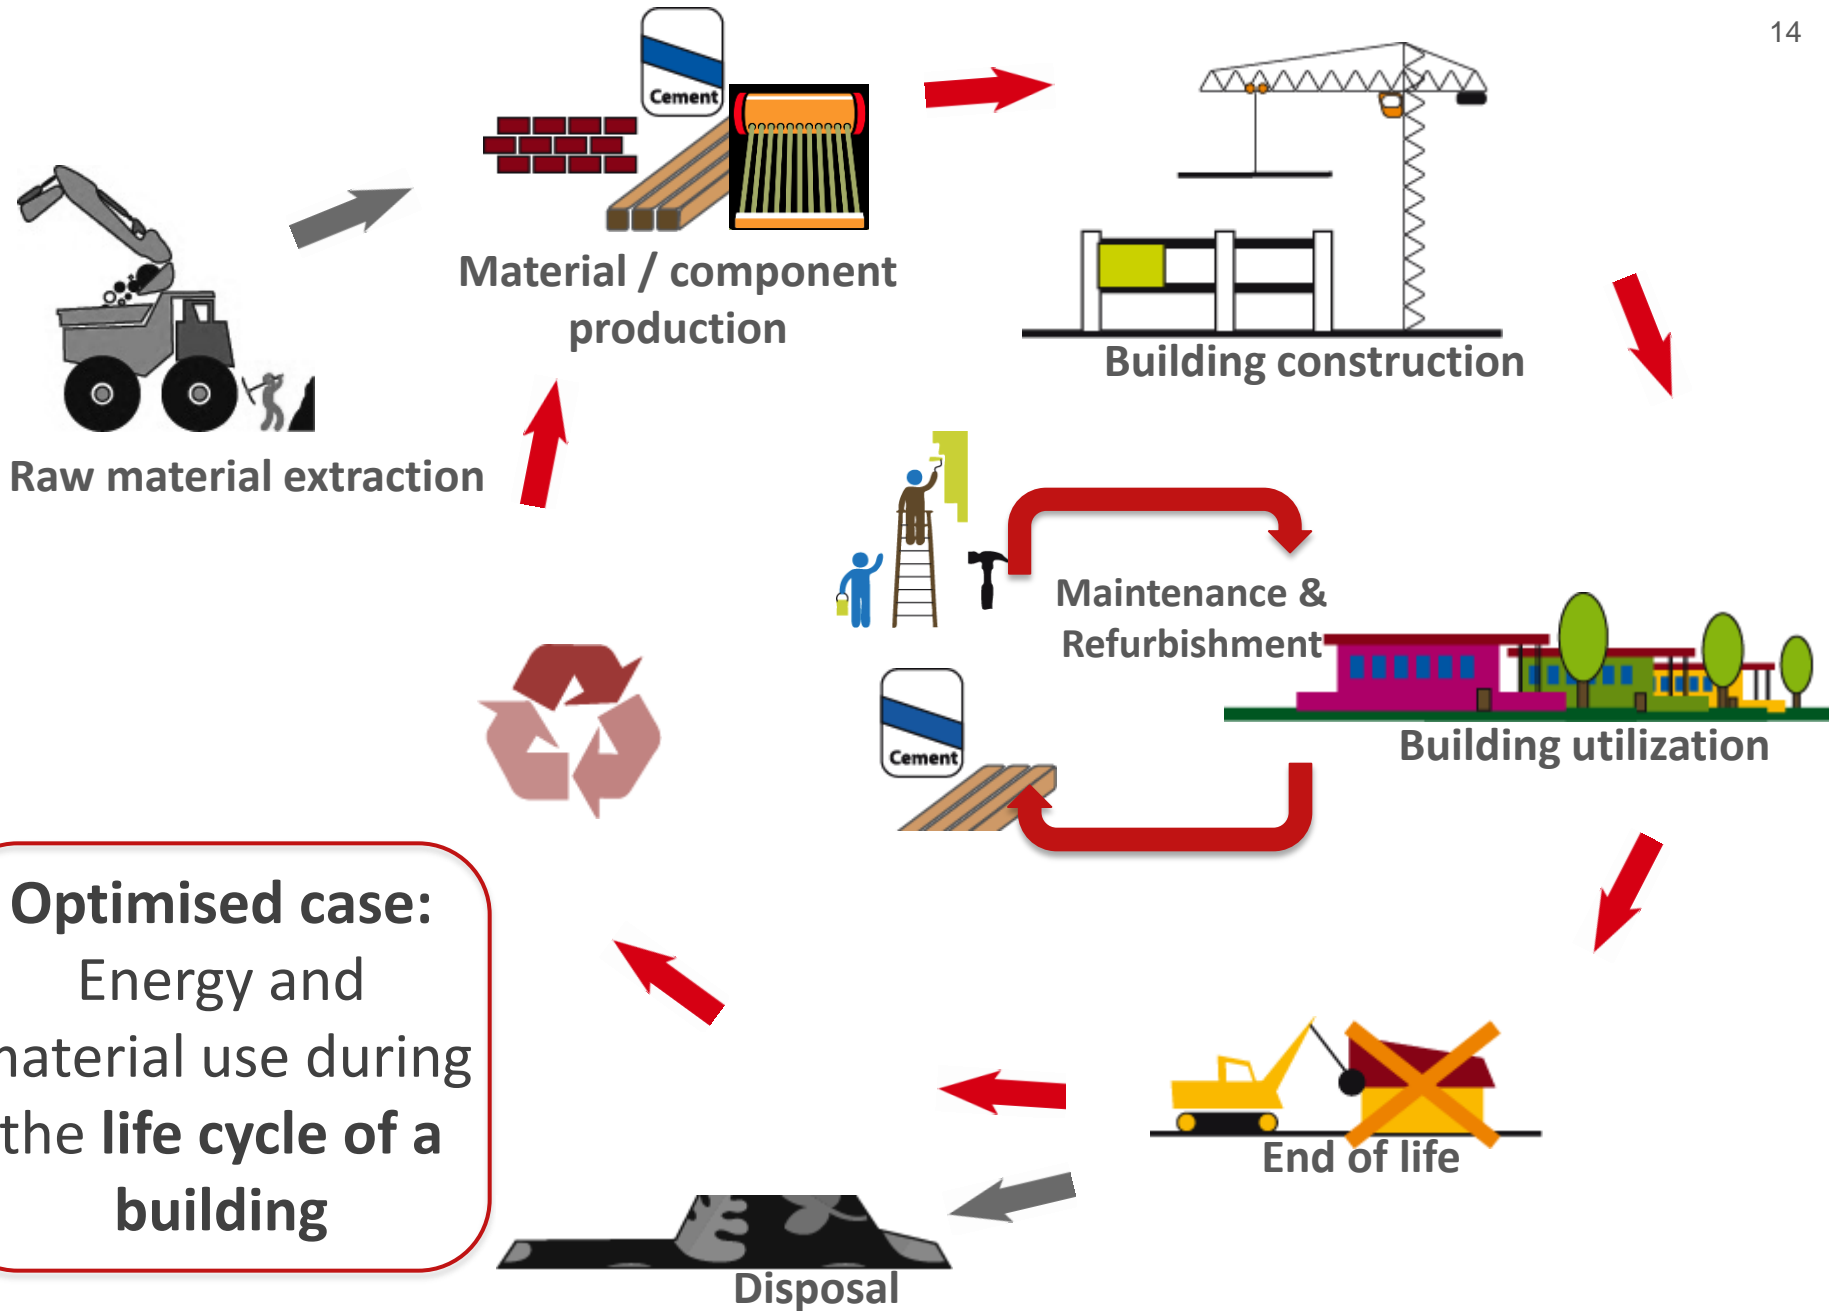

Optimised case:
Energy and material use during the **life cycle of a building**

■ ■ Methods of optimisation: LCA and LCCA

■ ■ LCA – Life Cycle Assessment I procedure

A Life Cycle Assessment is conducted in four steps (ISO 14040/44):

1. Definition of goal and scope

The first step of a Life Cycle Assessment specifies the objective(s) and the framework of the investigation. This includes: definition of the system boundaries, of the system's functional unit, and of requirements in terms of data quality.

2. Life Cycle Inventory (LCI)

The Life Cycle Inventory step includes data collection for all required input and output materials (resources, emissions), as well as energy flows. All material and energy flows are recorded and compiled in the inventory.

3. Life Cycle Impact Assessment (LCIA)


Life Cycle Impact Assessment refers to the calculation of potential environmental impacts, effects on resource availability, and human health impacts. Impacts are calculated based on the inventory results and specific characterization models for each substance in the inventory.

4. Results and Interpretation

The calculated LCI and LCIA results are interpreted with respect to the goal of the LCA study and recommendations for decision-making are given.

Source: http://www.ibp.fraunhofer.de/en/Expertise/Life_Cycle_Engineering/Life_Cycle_Assessment.html


- ■ **Methods of optimisation: LCA and LCCA**
- ■ **Definition of terms | Whole Life Cost and Life Cycle Cost**

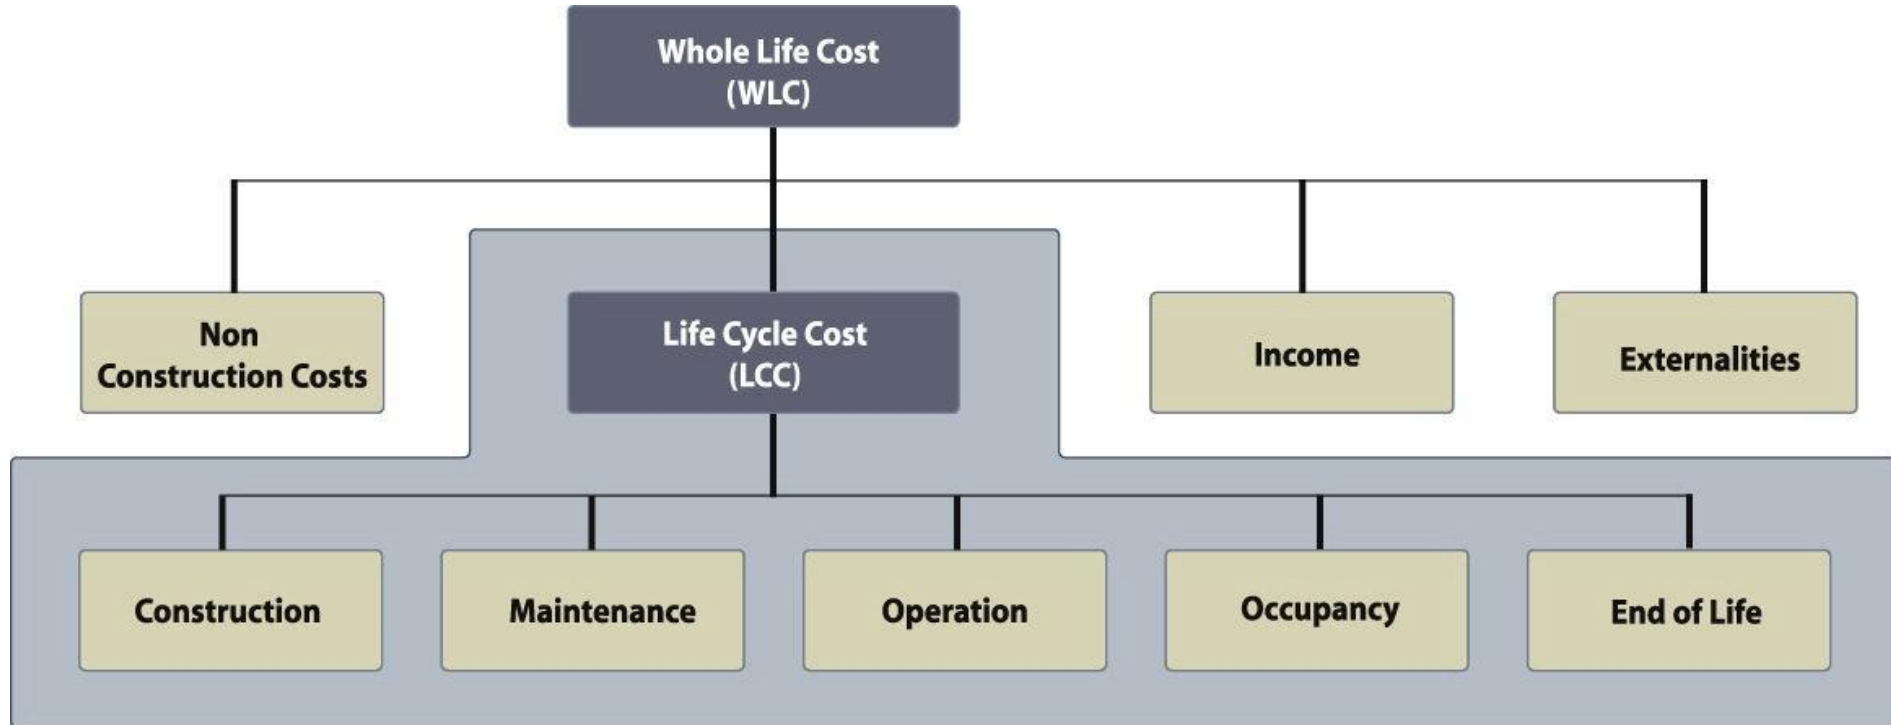

Methods of optimisation: LCA and LCCA

Life cycle optimisation I assessment of design variants

Motivation for LCCA: Slightly higher up front cost could result in substantially lower running costs.


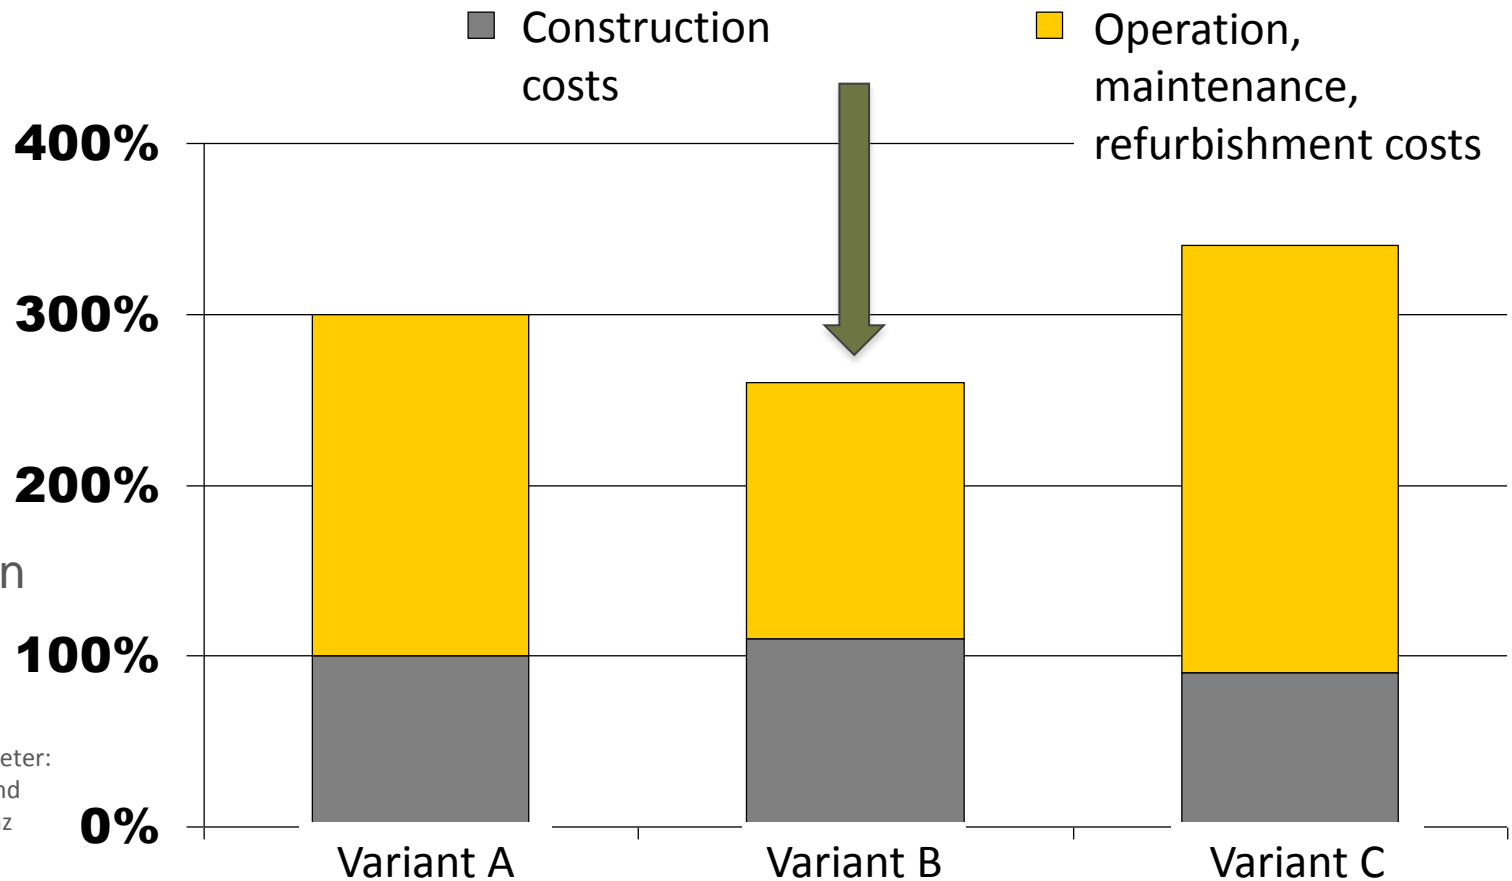


Source: Prof. Andrea Pelzeter:
Lebenszykluskosten IST und
SOLL Euroforum Konferenz
2008

Methods of optimisation: LCA and LCCA



Practical application | sustainable public procurement

Option – Cost Cutting Solution

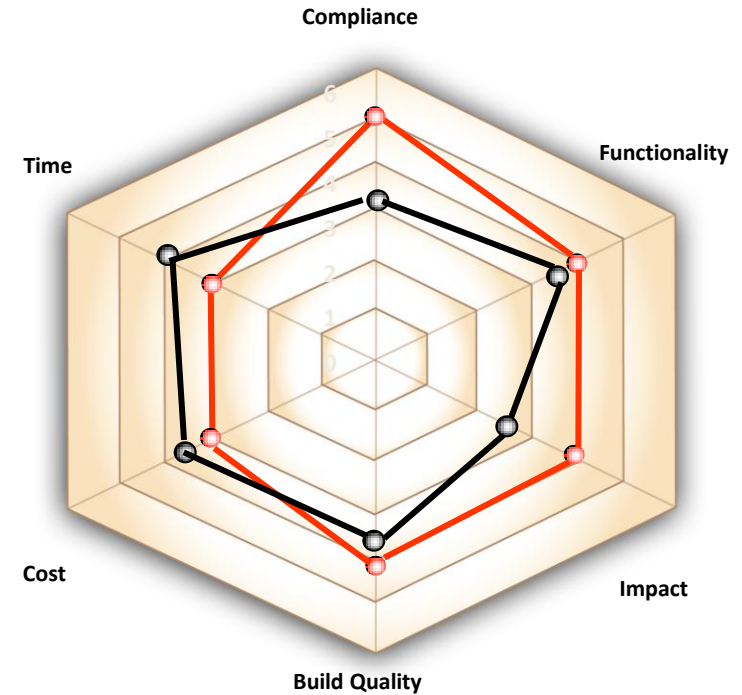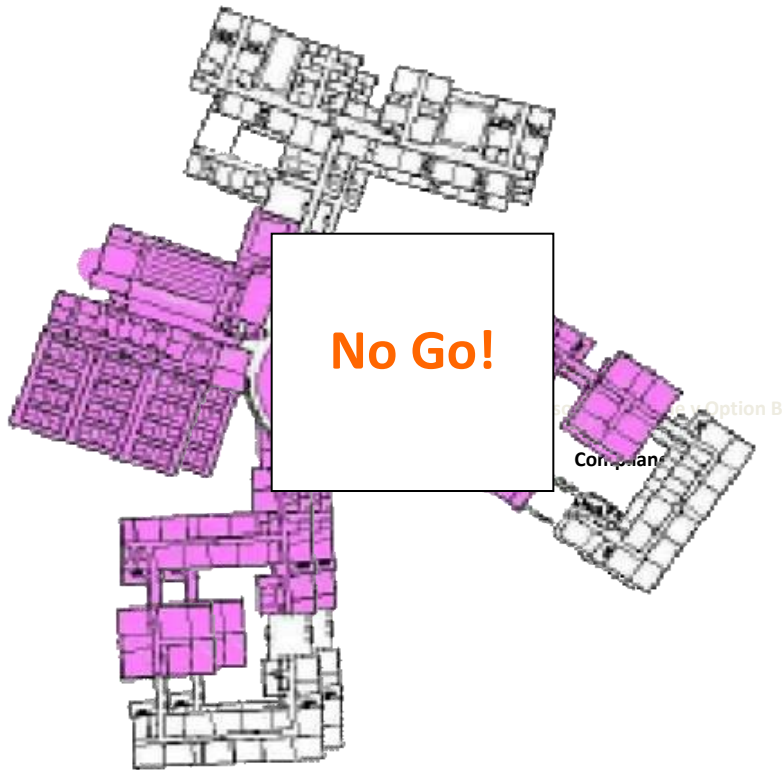

Source: Introducing the New Standards for Life Cycle Costing in Construction. BS ISO 15686-5:2008 for LCC and the New UK Supplements. Stockholm Conference, Friday 27th November 2009. Presented by Andrew Green


- ■ **Methods of optimisation: LCA and LCCA**
- ■ **Practical application | sustainable public procurement**

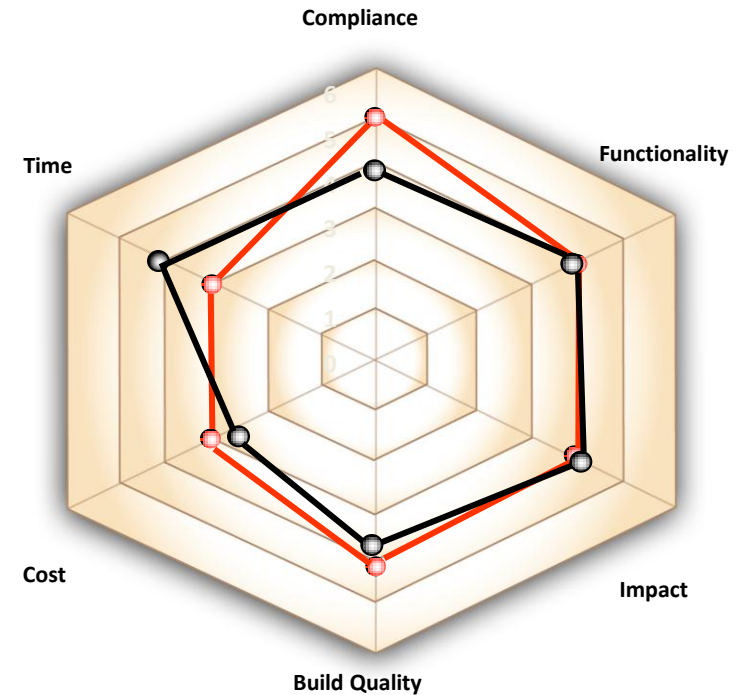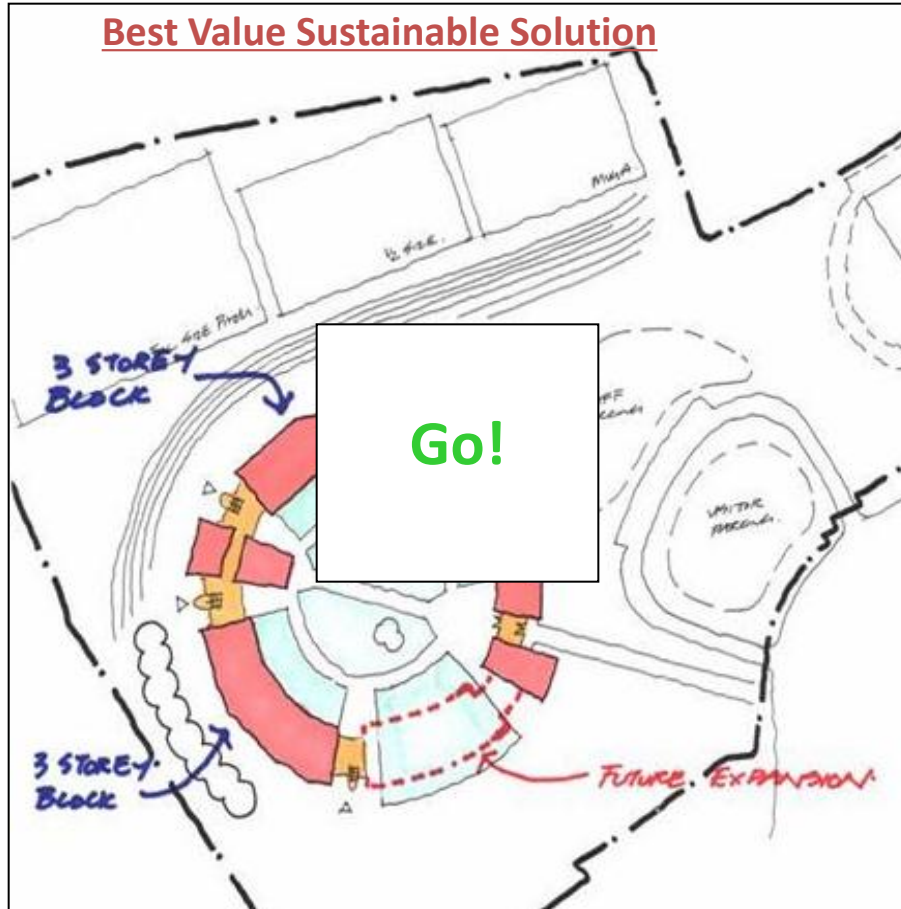

Source: Introducing the New Standards for Life Cycle Costing in Construction. BS ISO 15686-5:2008 for LCC and the New UK Supplements. Stockholm Conference, Friday 27th November 2009. Presented by Andrew Green

Energy efficient buildings

Building design in tropical climates | some elements

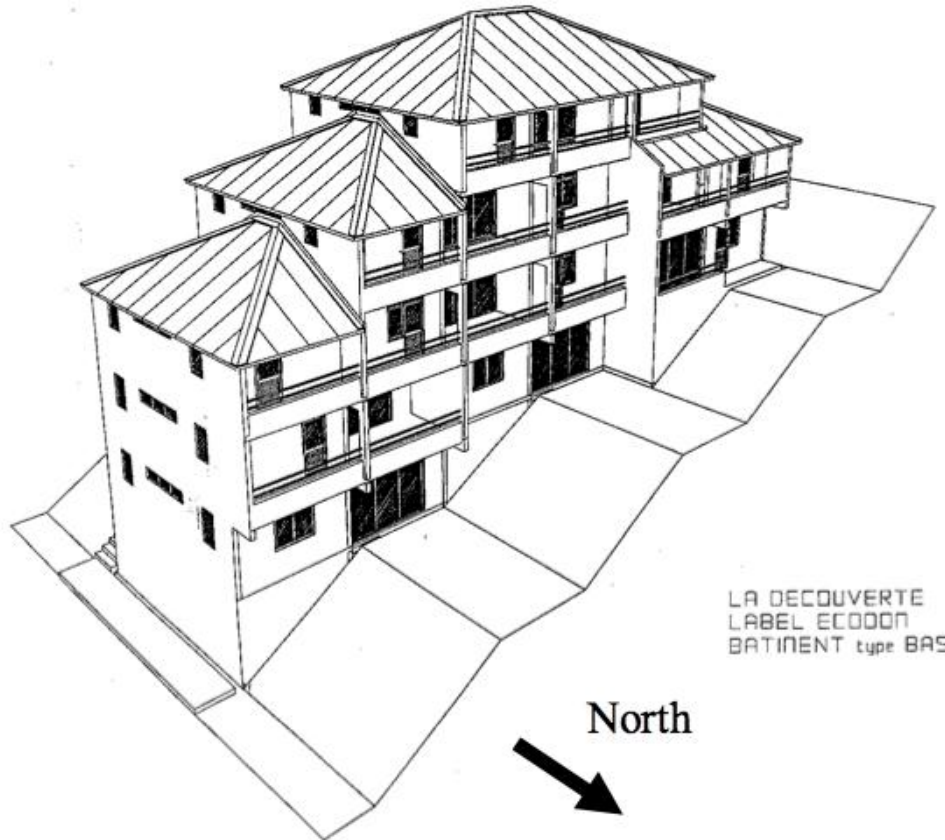

Position on site

Solar protection of walls and windows (shading)

Solar protection of the roof

Insulation of east and west sides

Natural ventilation

François Garde et al.: Building Design in Tropical Climates. Elaboration of the Ecodom Standard in the French Tropical Islands. ISES'99, International Solar Energy Society, Jérusalem, ISRAEL, Juin 1999

Thank you for your attention!

office@sustain.at
geral@cesarfreitas.com

PRAIA, CABO VERDE, 9th-10th June 2014

SERA Sustainable Energy & Resources Availability

SUSANNE GEISSLER _ CÉSAR FREITAS